

# **SIGNAGE PRODUCTS**

description of most typical kinds we offer  
information for RFQ and ordering



**PROFIL 0 (P0)****description**

objects of massive materials (PVC, wood, metals, PMMA)

**fastening options**

directly to the wall (carrier), on pins (with spacers), on back rails

**limits for single object**

max size - 2990 mm

min size - 25mm

min 'line weight' - 5mm

**finishing options**

painting (wet or powder)

lacquering

taping with vinyl films

**PROFIL 1 (P1, P01)****description**

formed objects (of metals) without lightening

**fastening options**

directly to the wall (carrier), on pins (with spacers), on back rails

**limits for single object**

max size - 2990 mm

min size - 100 mm

min 'line weight' - 20 mm

max thickness - 180 mm

min thickness - 15mm

**finishing options**

painting (wet or powder)

polishing, lacquering

taping with vinyl films

**PROFIL 3 (P3)****description**

formed objects (of metals) with backward light

**fastening options**

on pins (with spacers), on back rails

**limits**

max size - 2990 mm

min size - 100 mm

min 'line weight' - 25 mm

max thickness - 150 mm

min thickness - 30 mm

**finishing options**

painting (wet or powder)

polishing, lacquering

taping with vinyl films

**PROFIL 4 (P4)****description**

formed objects (of metals) with lighted fronts  
L- profile for holding fronts.

**fastening options**

directly to the wall (carrier), on pins (with spacers), on back rails

**limits for single object**

max size - 2990 mm  
min size - 280 mm  
min 'line weight' - 50 mm

max thickness - 180 mm  
min thickness - 50 mm

**finishing options**

painting (wet or powder)  
lacquering  
taping with vinyl films

**PROFIL 5 (P5)****description**

formed objects (of metals) with lighted fronts.  
special profile for holding fronts ('Elkamet', 'f-signTrim' etc)

**fastening options**

directly to the wall (carrier), on pins (with spacers), on back rails

**limits for single object**

max size - 1000 mm  
min size - 280 mm  
min 'line weight' - 50 mm

max thickness - 180 mm  
min thickness - 50 mm

**finishing options**

painting (wet or powder)  
lacquering  
taping with vinyl films

**PROFIL 6 (P6)****description**

formed objects (of metals) with lighted fronts  
fronts without framing

**fastening options**

directly to the wall (carrier), on pins (with spacers), on back rails

**limits for single object**

max size - 2990 mm  
min size - 110 mm  
min 'line weight' - 23 mm

max thickness - 200 mm  
min thickness - 35 mm

**finishing options**

painting (wet or powder)  
lacquering  
taping with vinyl films

**PROFIL 6/3 (P63)****description**

formed objects (of metals) with backward and frontward light

**fastening options**

on pins (with spacers), on back rails

**limits**

max size - 2990 mm  
min size - 200 mm  
min 'line weight' - 40 mm

max thickness - 150 mm  
min thickness - 70 mm

**finishing options**

painting (wet or powder)  
polishing, lacquering  
taping with vinyl films

**PROFIL 8 (P8, P9)****description**

formed objects (of metals and acrylics) with lighted fronts and sides

**fastening options**

directly to the wall (carrier), on pins (with spacers), on back rails

**limits for single object**

max size - 1480 mm  
min size - 150 mm  
min 'line weight' - 30 mm

ALU visible wall (depth) - 0 to 180 mm  
PMMA visible wall (depth) - 10 to 120 mm

**finishing options**

painting (wet or powder)  
lacquering  
taping with vinyl films

**PROFIL 10 (P10)****description**

metal shields (boxes) with outstanding acrylic elements (massive or formed)

**fastening options**

directly to the wall (carrier)

**limits for single module**


max size - 2980 mm  
min size - 100 mm

thickness (shield) - 30 to 150 mm  
thickness (acrylic) - 2 to 80 mm

**finishing options**

painting (wet or powder)  
lacquering  
taping with vinyl films

**PROFIL L01 (L01, L10)**

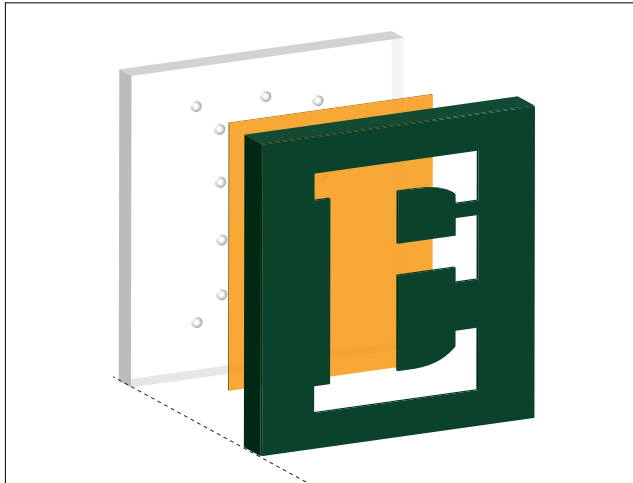

**description**

metal shields (boxes) with cut-open elements with acrylic behind

**fastening options**

directly to the wall (carrier)

**limits for single module**


max size - 2980 mm  
min size - 100 mm

thickness (shield) - 30 to 150 mm

**finishing options**

painting (wet or powder)  
lacquering  
taping with vinyl films

**PYLONS**

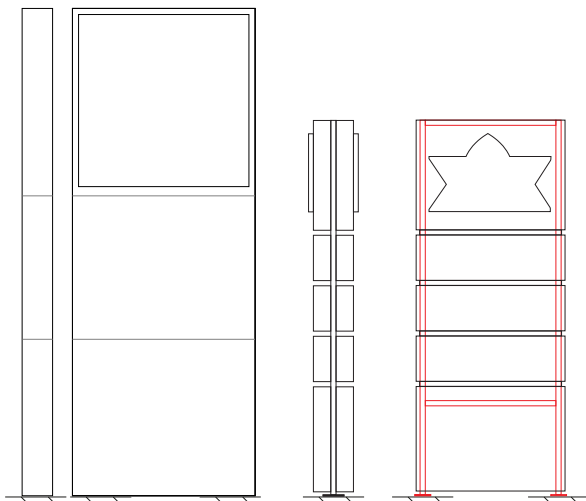

**description**

bearing structure + cladding using styles described above

**fastening options**

on concrete / ground

**limits for single object**

max height - 4000 mm  
max width - 2000 mm

**finishing options**

painting (wet or powder)  
lacquering  
taping with vinyl films

**MOST USED MATERIALS / BRANDS**

**metals**

|   |              |
|---|--------------|
| ALU sheets EN1050, EN5754                 | 1.0 to 10 mm |
| ALU pipes and profiles EN6060, EN 6063    |              |
| stainless steel AISI 304 sheets and pipes | 0.6 to 5 mm  |
| brass sheets                              | 0.8 to 5 mm  |

**adhesive vynils**

|                      |                                |
|----------------------|--------------------------------|
| graphics (lettering) | ORACAL 551, MACal 9800 ser.    |
| taping & decoration  | ORACAL 551, 3M 1080/1380 ser.  |
| transluents          | ORACAL 8500, 3M 3630/3635 ser. |

**acrylics**

|                                |              |
|--------------------------------|--------------|
| PLEXIGLAS® XT Clear            | 2.0 to 20 mm |
| PLEXIGLAS® XT & GS Opal        | 2.0 to 10 mm |
| PLEXIGLAS® XT & GS colors      | 3 mm         |
| PLEXIGLAS® XT & GS some colors | 10 mm        |

**LED emitters (IP67, 5 y. warranty\*), power units**

|                   |                          |
|-------------------|--------------------------|
| white, warm white | 6500K, 3000K, 4000K      |
| red, green, blue  |                          |
| RGB (controlled)  |                          |
| power adaptors    | 12v constant or dimmable |

\* - manufacturers warranty

## REQUEST FOR QUOTATION (RFQ) INFORMATION

### file formats

|                       |                      |
|-----------------------|----------------------|
| vector graphics       | Ai, EPS, PDF (Adobe) |
| CAD                   | DWG, DXF             |
| bitmap (for printing) | TIFF, PSD, JPEG      |
| documents             | MS Office, PDF       |

### color references

Pantone Solid Coated / Uncoated  
RAL Classic  
cmyk

### other

|           |                           |
|-----------|---------------------------|
| languages | english, latvian, russian |
| units     | metric                    |
| email     | signs@latmet.com          |

## ORDERING INFORMATION

### info should be clearly provided

payer (legal) and person who place the order

full delivery address / contact person

delivery restrictions (if have place) as special visiting times, unloading weight or size limits, dimensions of delivery transport

### order description requirements

all the same as for RFQ (above)

### transportation limits

largest indivisible part (packed) can not exceed any of these measures **L 13.6m W 2.4m H 2.65m** and weight **24t**

## WARRANTY

our standard warranty is **2 years** counting from invoice date,  
but considering table below

| case  | warranty covers |
|---|-----------------|
| wrong designed or defective structural elements         | yes             |
| defective assembling, defective painting or taping      | yes             |
| premature loss of colors of surfaces / elements         | yes             |
| poor sealing or drainage which caused electrical faults | yes             |
| defectively built wiring / poor internal connections    | yes             |
| random failure of LED modules or power adapters         | no              |

